


2 CD.

PART I

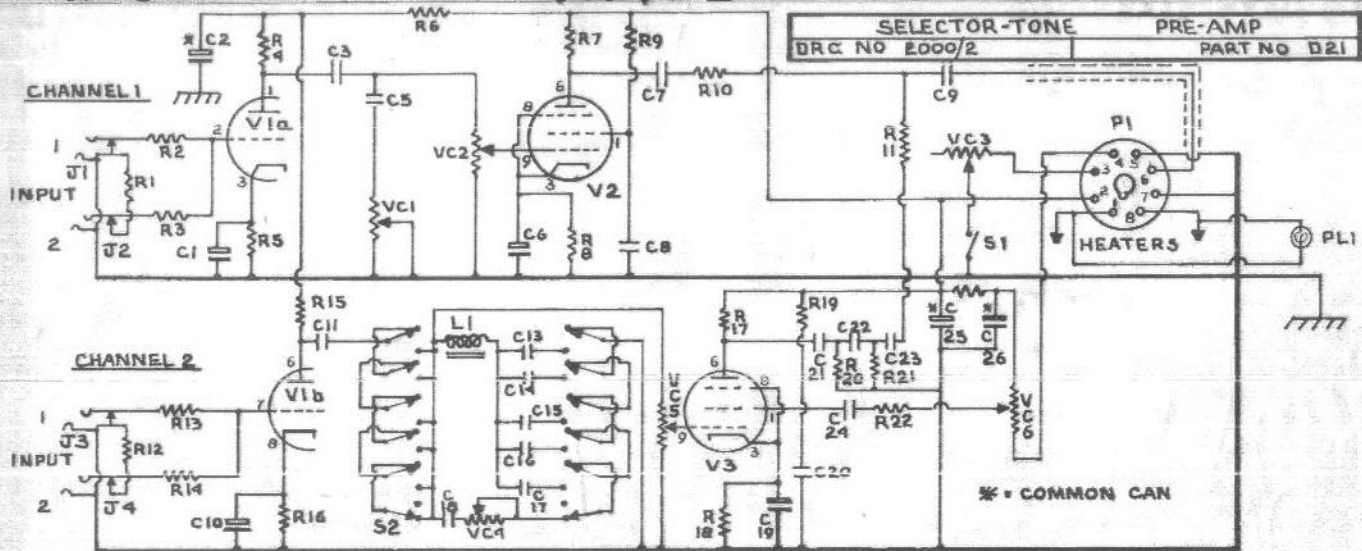


REF No	VALUE	PART No	REF No	MISCELLANEOUS	PART No	REF No	VALUE	PART No
R1-12-20-21	1M	R39	V1-2-3-4	JACK SOCKETS	S133	C1-6-10-19	25 mfd	C21
R2-3-13-14	56K	R418	L1	CHOKE 9.5H	C191	C2-25-26	16+16+16 mfd	C64
R4-15	220K	R30	PI	PLUG OCTAL	P57	C3-11	.02 mfd	C18
R5-16	1.5K	R12	PL1	PILOT LAMP 6.5v .3A (Tun.)	L27	C5-7-18	.01	CA
R6	47K	R23	S1	TREMOLO FOOT SWITCH	S410	C8	.05	C46
R7	470K	R32	V1	VALVE ECC83	V11	C9	.002	C86
R8	3.3K	R15	V2-V3	EF86	V77	C13	.001	C80
R9	4-7M	R5	VC1	.5M LOG TONE	P23	C14	.003	C199
R10-11	100K	R27	- 2	1M SEMI LOG VOLUME	P22	C16	.03	C44
R17-23	330K	R429	- 3	1M SEMI LOG TREM. SPEED	P22	C17	.2	C85
R18	5K	R16	- 4	.5M LOG TONE	P23	C20	.06	C110
R19	6-8M	R2	- 5	1M SEMI LOG VOLUME	P22	C21-22-23	.005	C30
R22	680K	R35	- 6	.25M LINEAR TREM. DEPTH	P9	C24	.1	C29
		S2		SWITCH TONE SELECTOR	S12	C15	.01	C67

* = COMMON CAN

PART II

VIBRATO OSC.

POWER AMP.

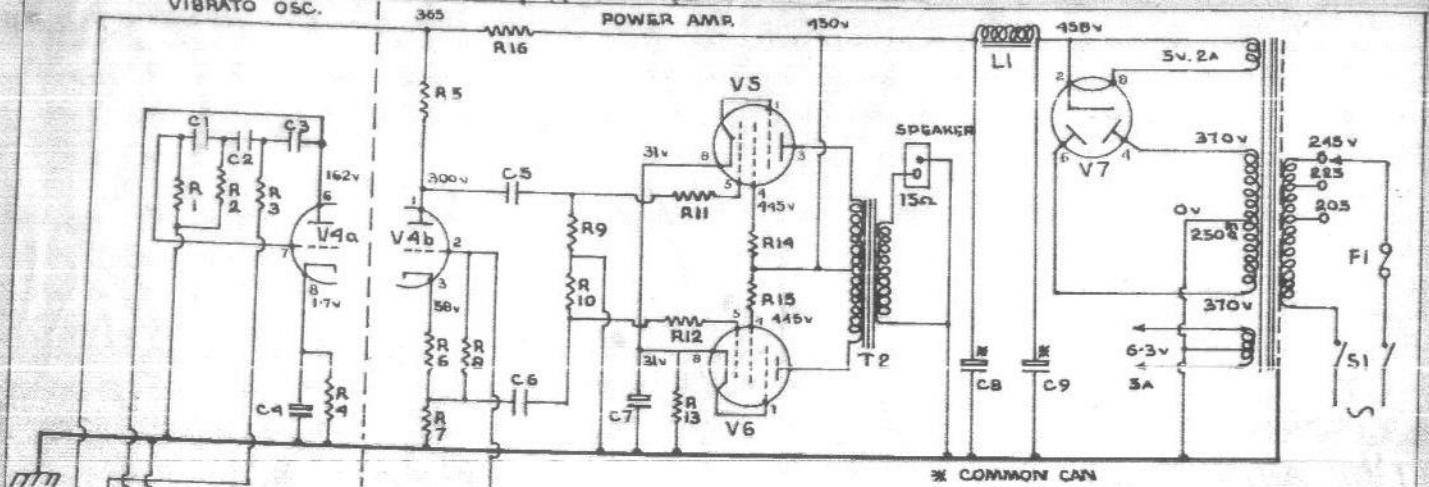

DRG No 1999/3

SELECTOR TONE - MAIN AMP

PART No D22

REF No	VALUE	PART No	REF No	MISCELLANEOUS	PART No	REF No	VALUE	PART No
C1	.01 mfd	C4	SPKR	15" GOODMANS	S527	R1	2.2 M	R13
C2	.015 "	C2	T1	MAINS TRANSFORMER	T52	R2	680 K	R35
C3	.03 "	C1	T2	O/P "	T16	R3	68K	R25
C4	.25 "	C21	F1	FUSE 1.5A	F32	R4	5K	R16
C5-6	.05 "	C16	S1	MAINS SWITCH	S188	RS-7	47K	R23
C7	.50 "	C517	L1	CHOKE 2.5 H	C364	R6	1.5K	R12
C8-9	32+32 " 300"	C22	SK1	OCTAL SOCKET	H7	R8	470K	R32
			V4	VALVE ECC83	V11	R9-10	220K	R30
			V5	" EL34	V9	R11-12	10K	R17
			V6	" EL34	V9	R13	250Ω 6W	R1
			V7	" 6Z34	V18	R14-15	1K	R74A
						R16	22K	R84

