

CHASSIS PARTS

Schematic Location	Part No.	Description
--------------------	----------	-------------

CAPACITORS

C1	20-016	Tubular, .01 mfd., 600 v.
C2, C4	20-026	Tubular, .02 mfd., 600 v.
C8	20-056	Tubular, .05 mfd., 600 v.
C5	25-2525	Electrolytic, 25 mfd., 25 v.
C6	30-40200	Trimmer Cond., 40-200 mmfd.
C7A-C7B	25-1010	Electrolytic, 10-10 mfd., 450 v.
C3	20-104	Tubular, .1 mfd., 400 v.

MISCELLANEOUS PARTS

T1	31-5683	Output Transformer
T2	31-25969	Power Transformer
	31-68	Fuse Holder
	31-2019	"On-Off" Switch

Schematic Location	Part No.	Description
--------------------	----------	-------------

RESISTORS

(All Resistors 1/2 watt unless otherwise noted)

R1, R2	18-68302	68K ohm, 20%
R3	22-10513	1 megohm, Tone
R4	22-10512	1 megohm, Volume
R5	18-15602	15 megohm, 20%
R6	18-39402	390K ohm, 20%
R7	18-56402	560K ohm, 20%
R8	18-27111	270 ohm, 10%, 1 watt
R9	18-22502	2.2 megohm, 20%, 1 watt
R10	18-15201	1.5K ohm, 10%
R11	18-15301	15K ohm, 10%

CABINET PARTS

Part No.	Description
31-32	Cabinet and Back
31-128	Leather Handle
31-88	Handle Hardware
475-35	Control Knob, brown
31-186	Rubber Feet (4)
31-832	8" Speaker 3.2 ohm imp.
31-00	Instruction Sheet


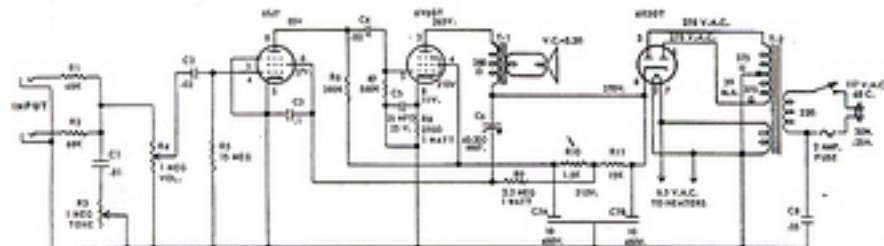


FIG. 5. SCHEMATIC DIAGRAM OF SILVERTONE CHASSIS 1331

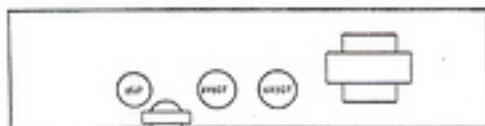

NOTES:

- VALUES OF CAPACITORS IN MFD. UNLESS OTHERWISE NOTED.
- ALL RESISTORS ARE 1/2 WATT UNLESS OTHERWISE NOTED.
- VOLTAGES MEASURED FROM POINTS INDICATED TO CHASSIS WITH 2500 OHM/VOLT METER.

SILVERTONE MODEL 1331 (CH: 185.805)

Information Courtesy of Sears, Roebuck & Company