


ITEM NO.	QTY	DESCRIPTION
1	1	...
2	1	...
3	1	...
4	1	...
5	1	...
6	1	...
7	1	...
8	1	...
9	1	...
10	1	...

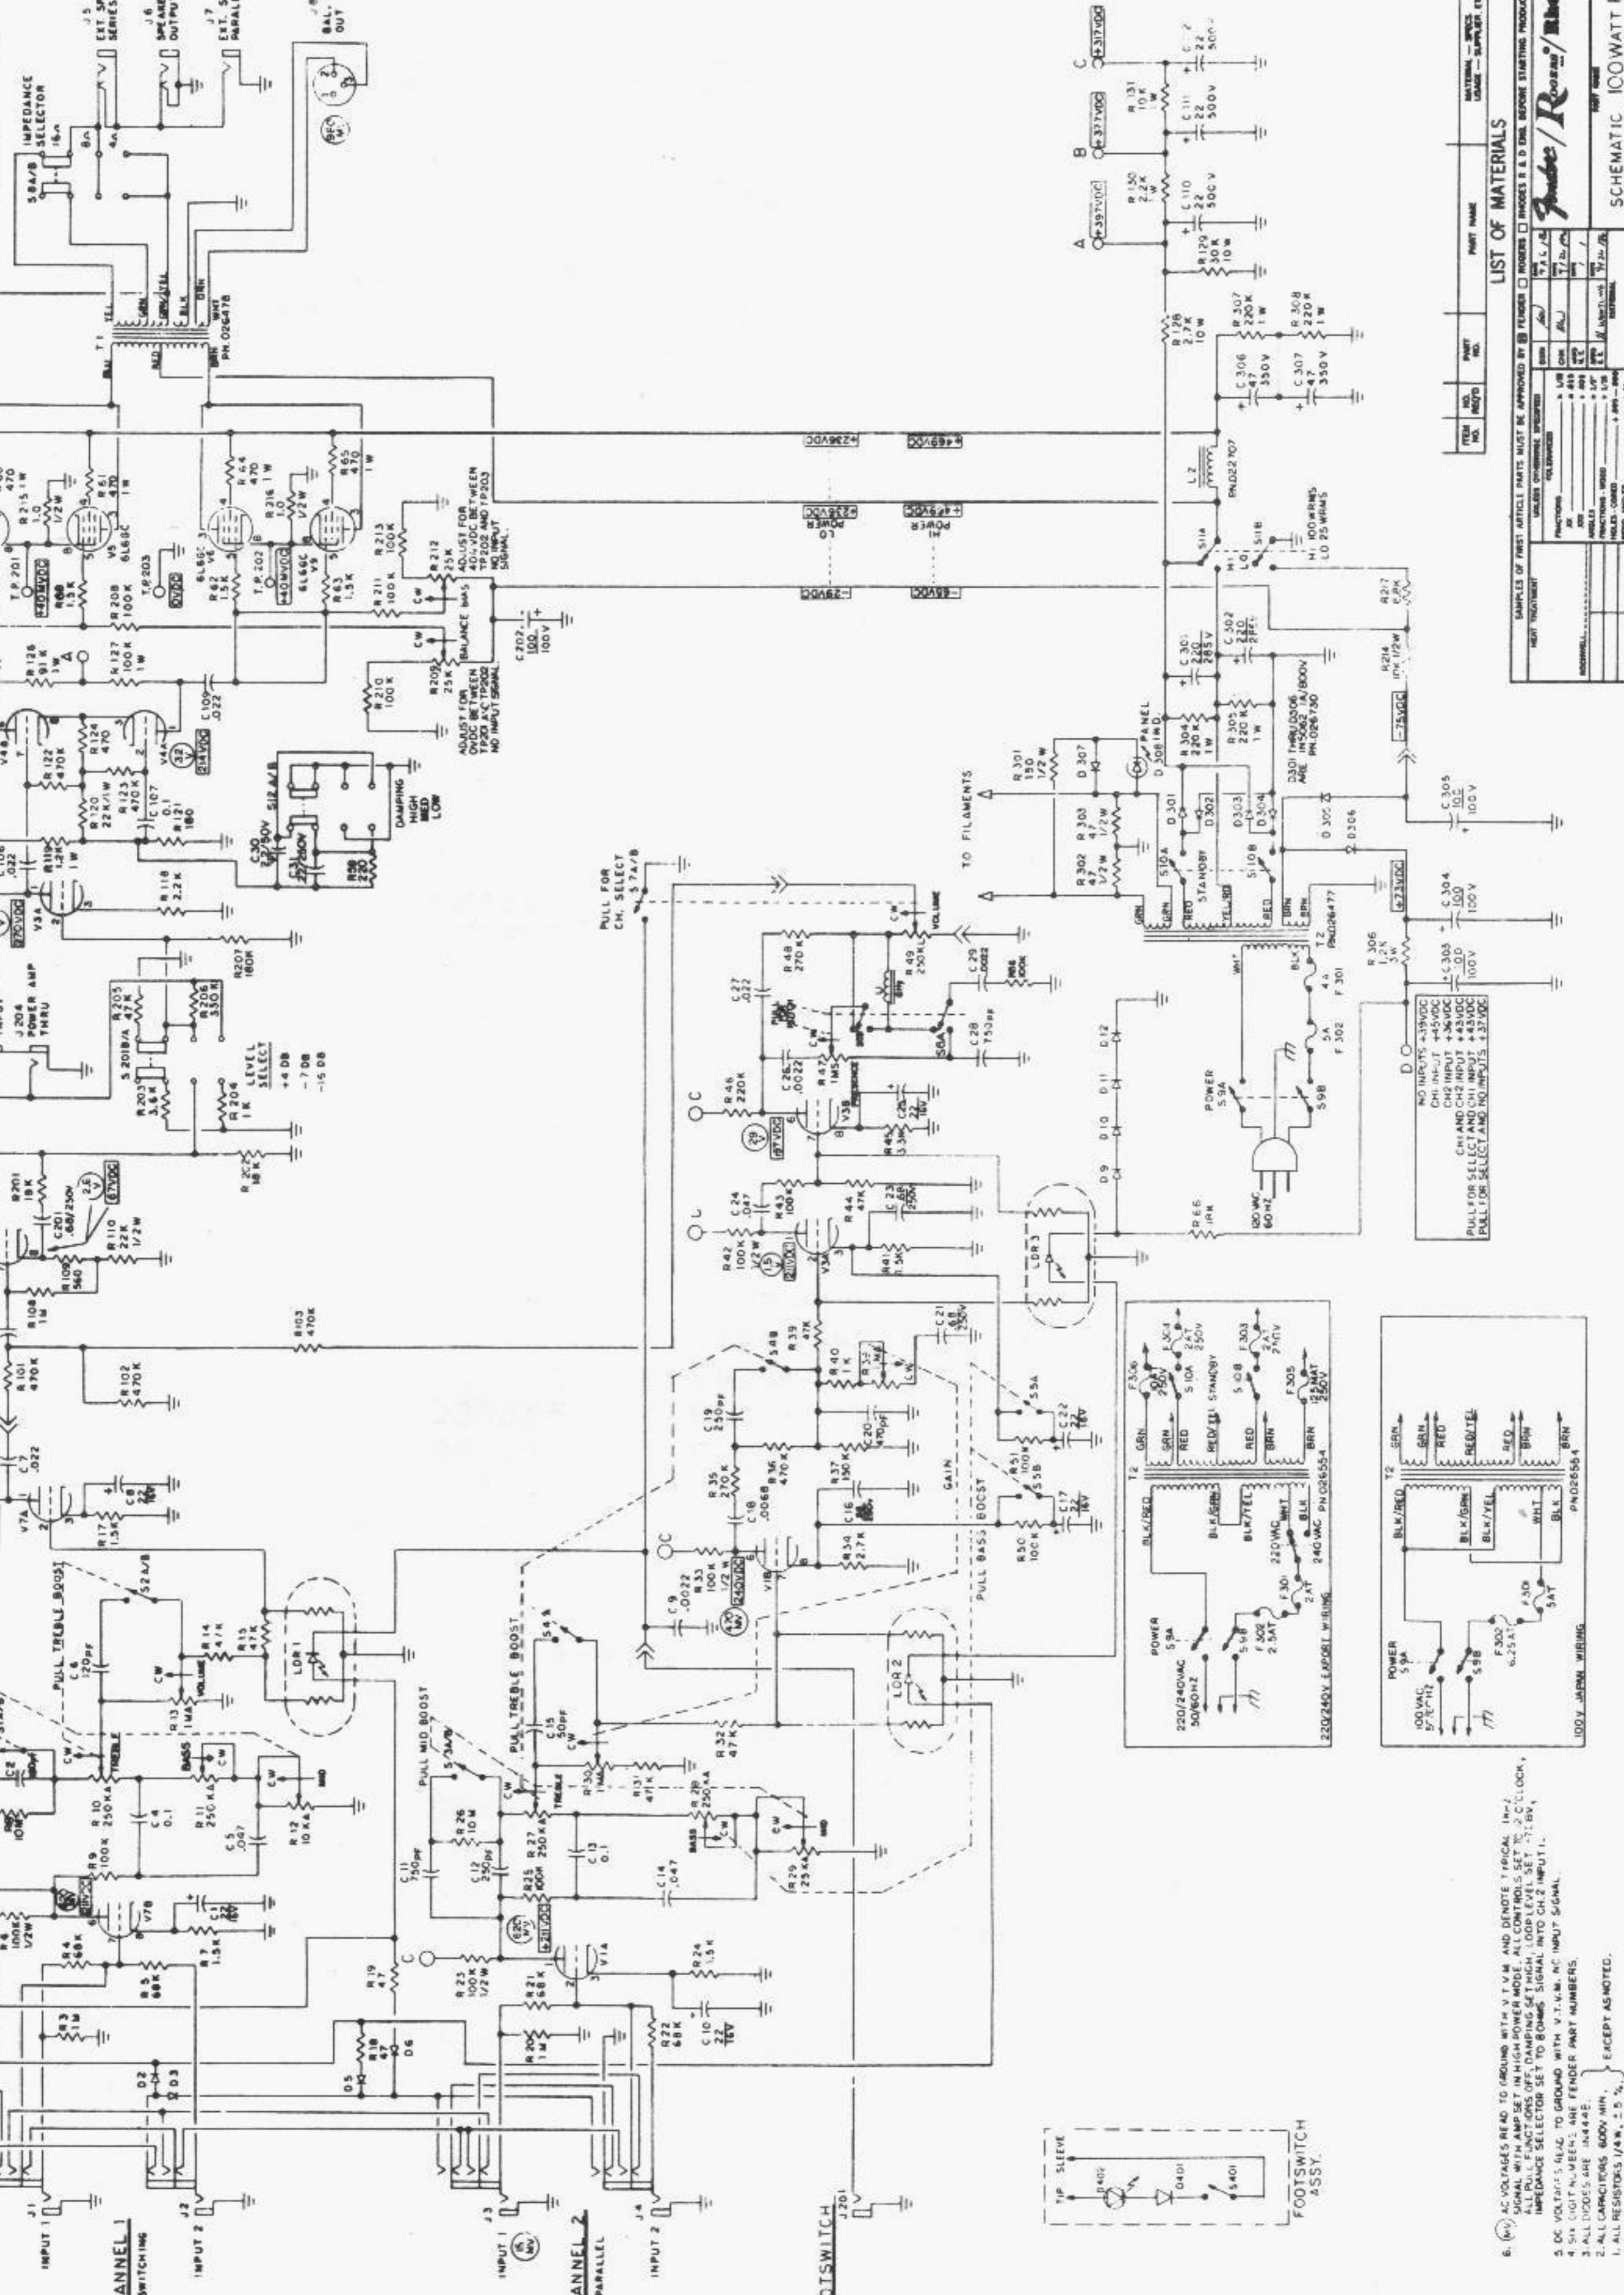


LIST OF MATERIALS

ITEM NO.	QTY	DESCRIPTION	MANUFACTURER
1	1
2	1
3	1
4	1
5	1
6	1
7	1
8	1
9	1
10	1

SAMPLES OF PARTS MUST BE APPROVED BY FENDER R & D DIV. BEFORE STARTING PRODUCTION.

ITEM NO.	QTY	DESCRIPTION	MANUFACTURER
1	1
2	1
3	1
4	1
5	1
6	1
7	1
8	1
9	1
10	1

NO INPUTS -15VDC
 CH1 INPUT -45VDC
 CH2 INPUT -45VDC
 CH1 AND CH2 INPUTS -15VDC
 PULL FOR SELECT AND NO INPUTS
 PULL FOR SELECT AND NO INPUTS

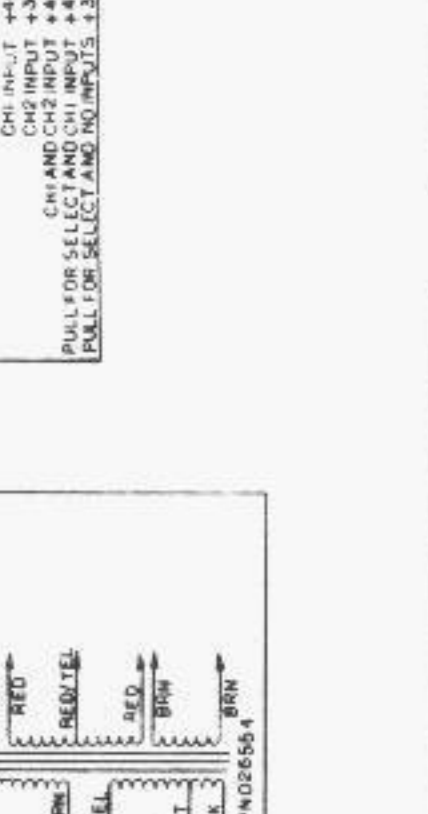

NOTES:

- AC VOLTAGES READ TO GROUND WITH V.T.M. AND DENOTE TYPICAL 100% SIGNAL WITH AMP SET IN HIGH-POWER MODE. ALL CONTROLS SET TO 2 O'CLOCK. IMPEDANCE SELECTOR SET TO 800Ω. SIGNAL, LODD LEVEL SET TO 15V.
- DC VOLTAGES READ TO GROUND WITH V.T.M. AC INPUT SIGNAL.
- SIX COTPN. WINDINGS ARE FENDER PART NUMBERS.
- ALL CAPACITORS 600V MIN.
- ALL RESISTORS 1/4W, ±5%.

EXCEPT AS NOTED.