

FENDER "VIBRASONIC" SCHEMATIC


MODEL 6G/3-A

K-FJ

NOTICE

- 1- VOLTAGES READ TO GROUND WITH ELECTRONIC VOLTMETER. VALUES SHOWN + OR - 20%
- 2- ALL RESISTORS 1/2 WATT, 10% TOLERANCE IF NOT SPECIFIED
- 3- ALL CAPACITORS AT LEAST 400 VOLT RATING IF NOT SPECIFIED

CIRCUIT PATENTS #2,817,709, #2,973,681
TONE CONTROL CIRCUITS PAT. PEND.

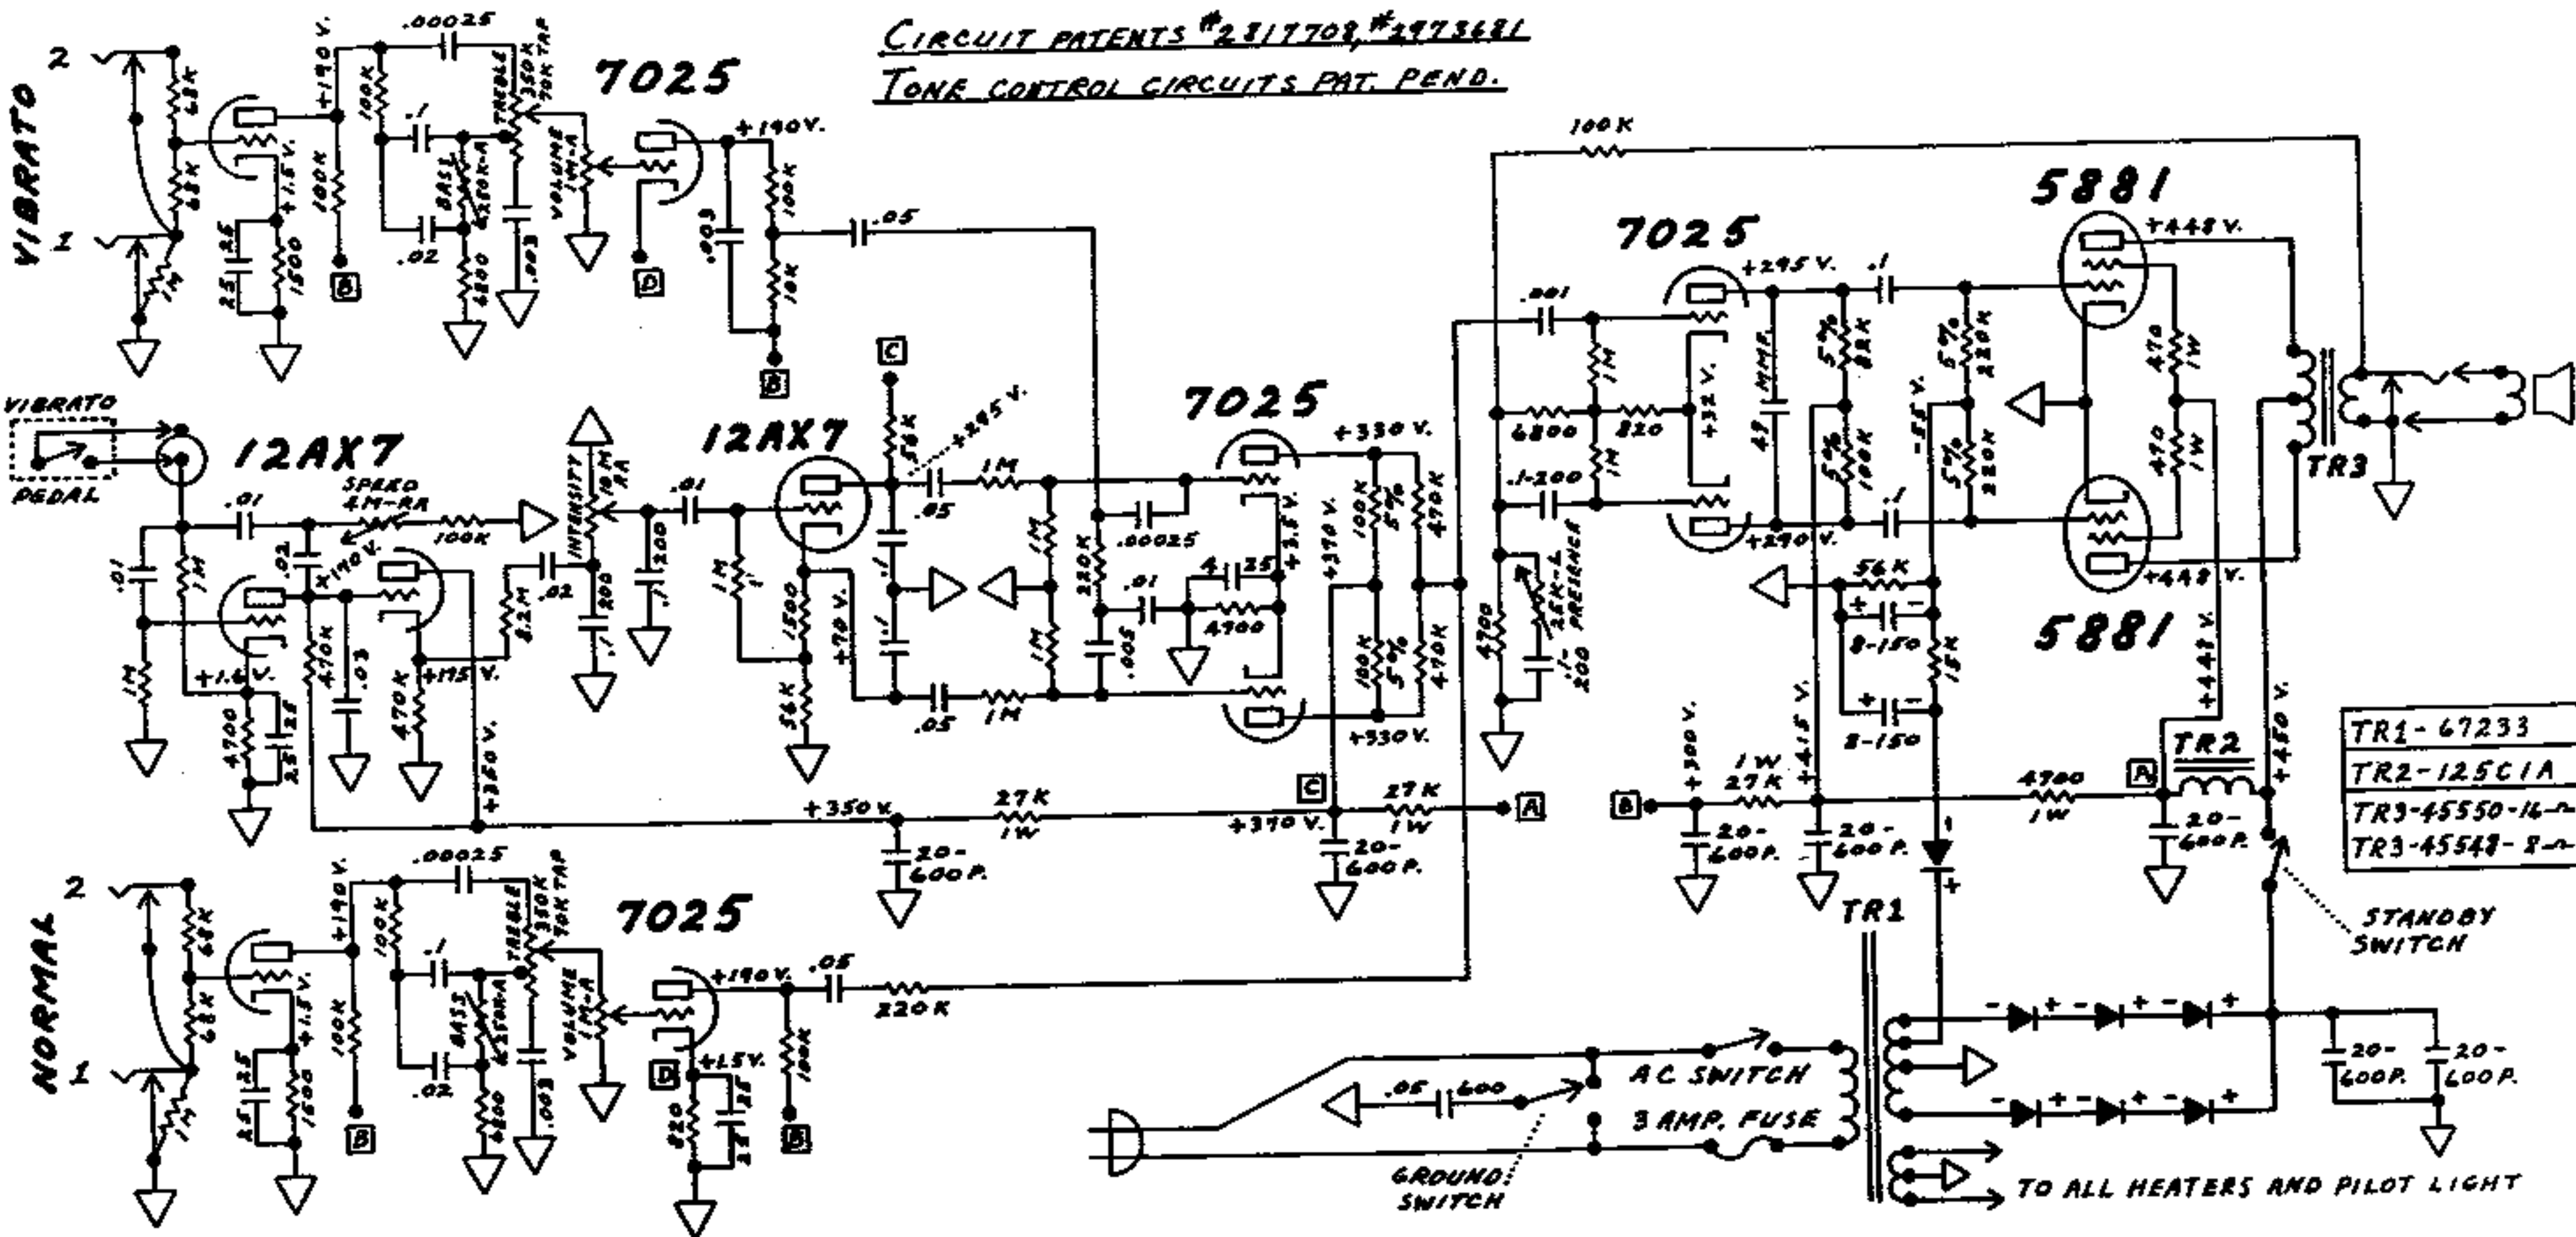

TR1-67233
TR2-125C1A
TR3-45550-16- Ω
TR3-45548-8- Ω

STANDBY SWITCH

GROUND SWITCH


TO ALL HEATERS AND PILOT LIGHT

FENDER "VIBRASONIC" LAYOUT

MODEL 6G13-A

K-F J

NOTICE
VOLTAGES READ TO GROUND WITH ELECTRONIC
VOLTMETER. VALUES SHOWN + OR - 20%

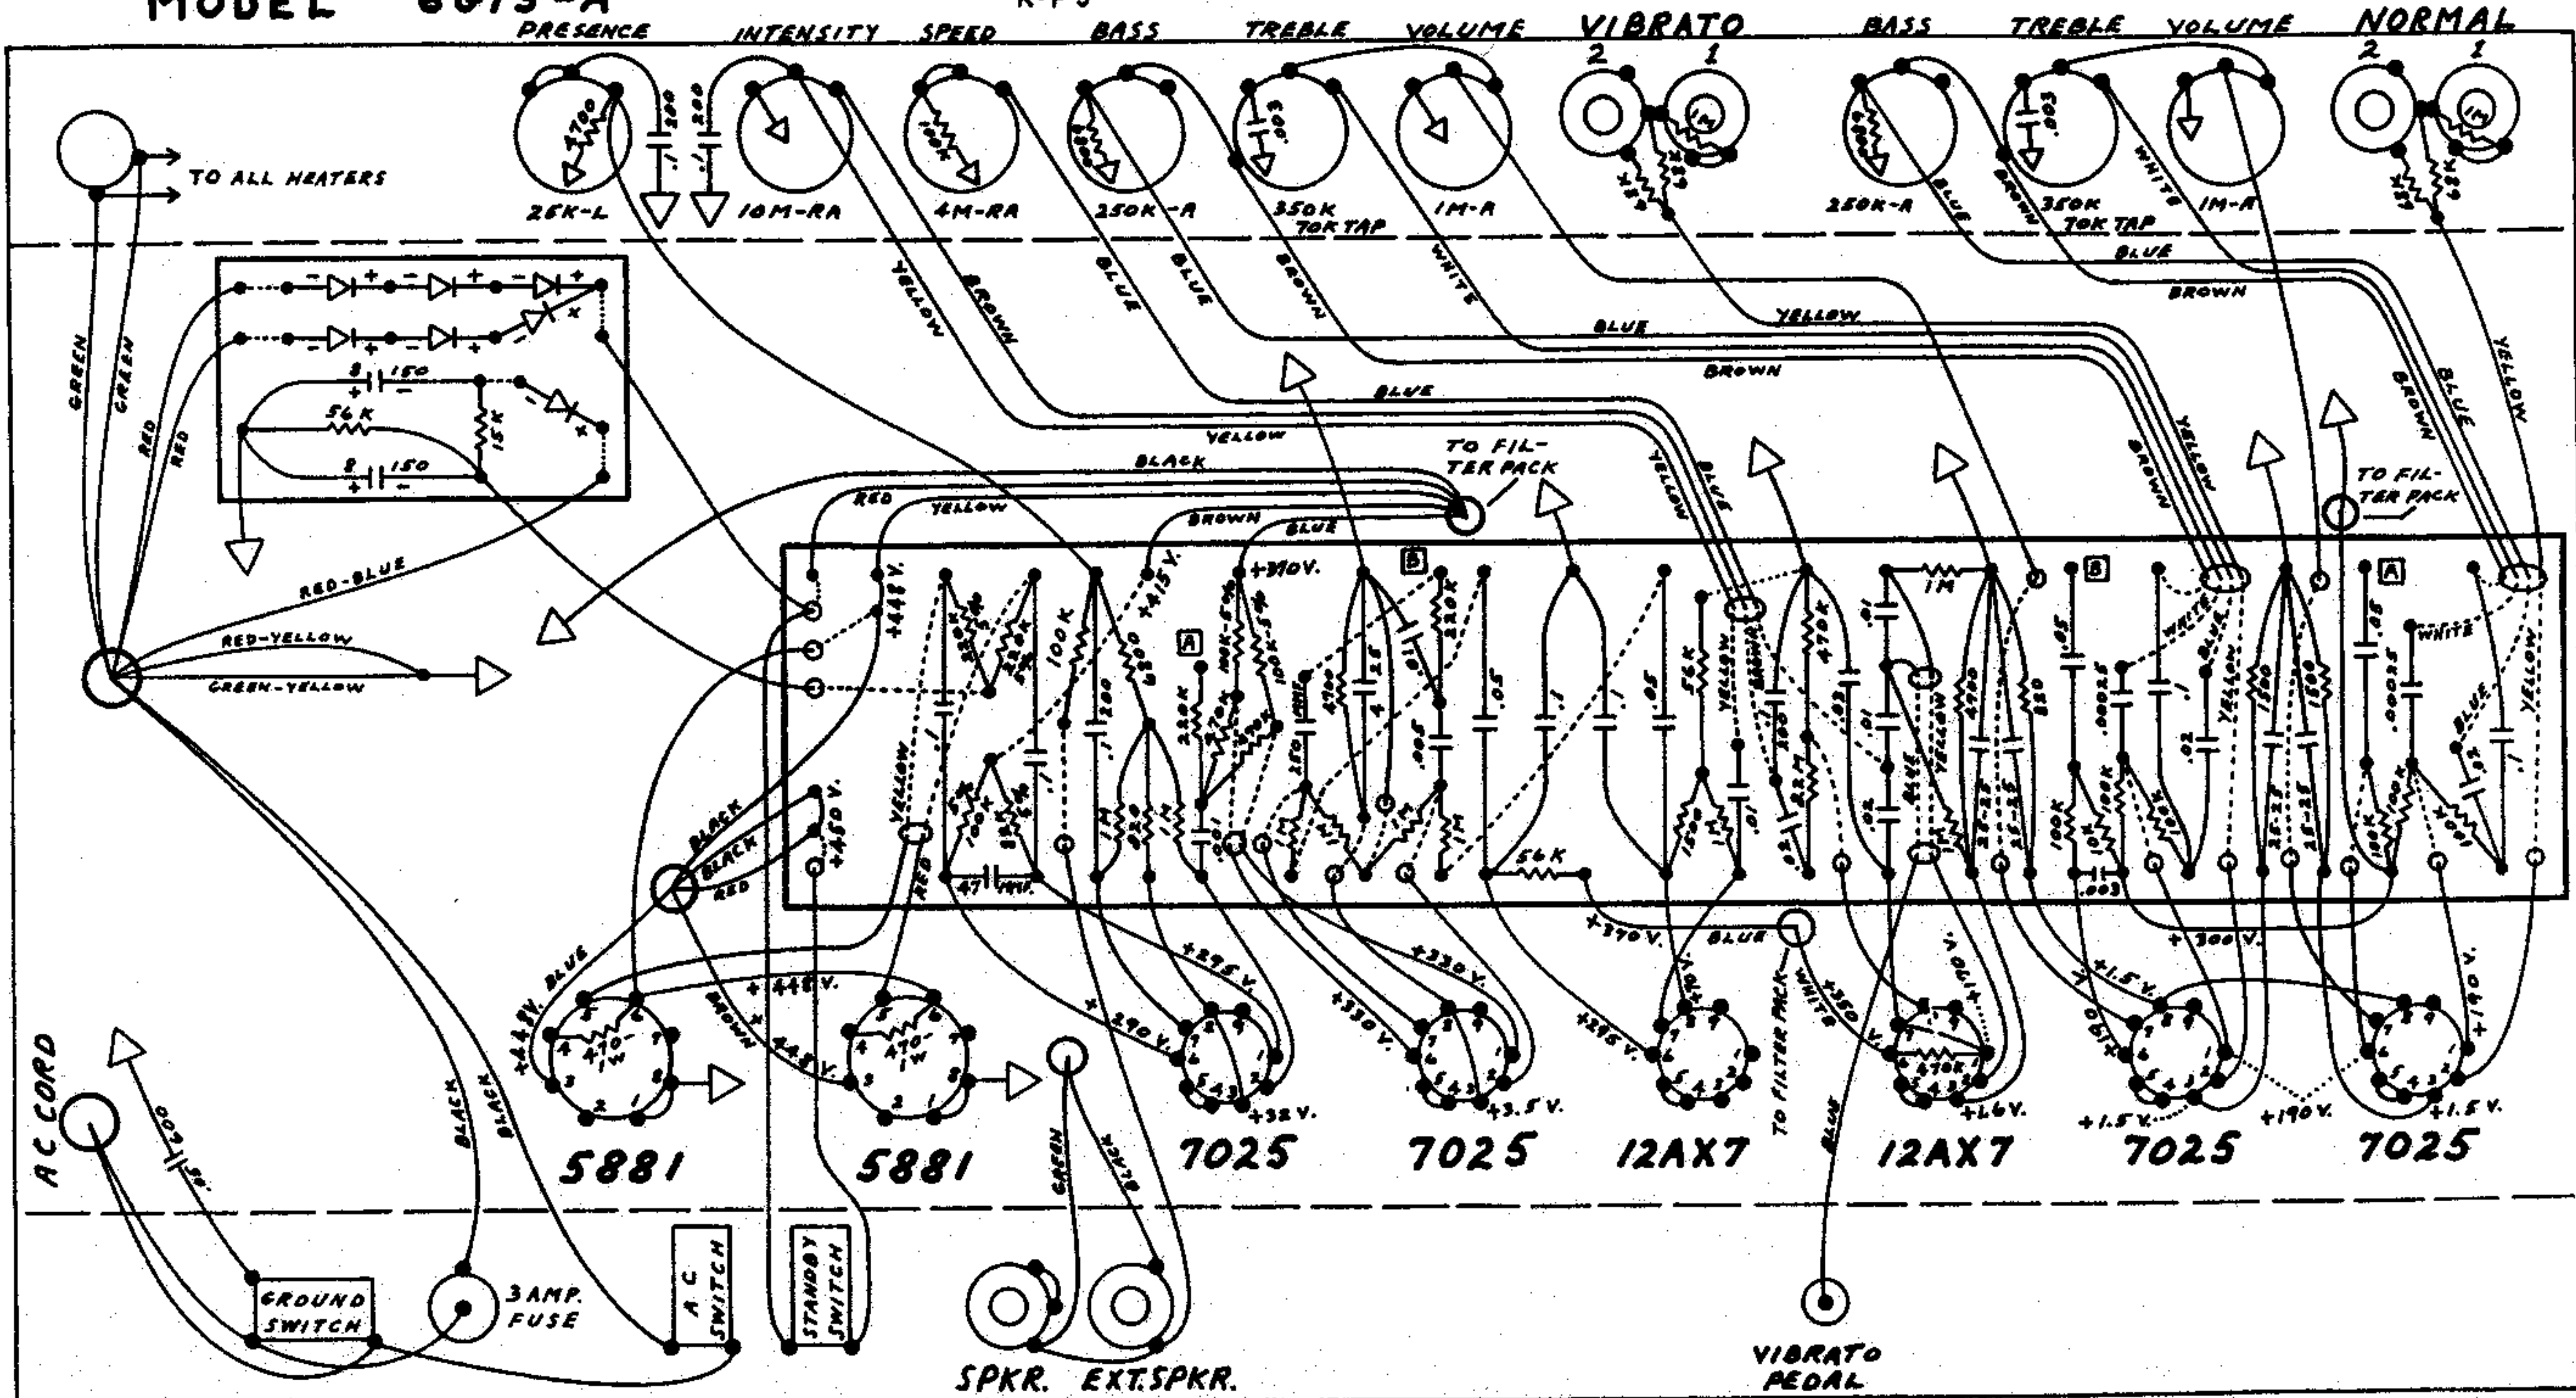

NOTE - ALL RESISTORS 1/2 WATT, 10% TOLERANCE, UNLESS SPECIFIED.

NOTE - ALL CAPACITORS AT LEAST 400 VOLT RATING UNLESS SPECIFIED